


LCR-Reader-MPA

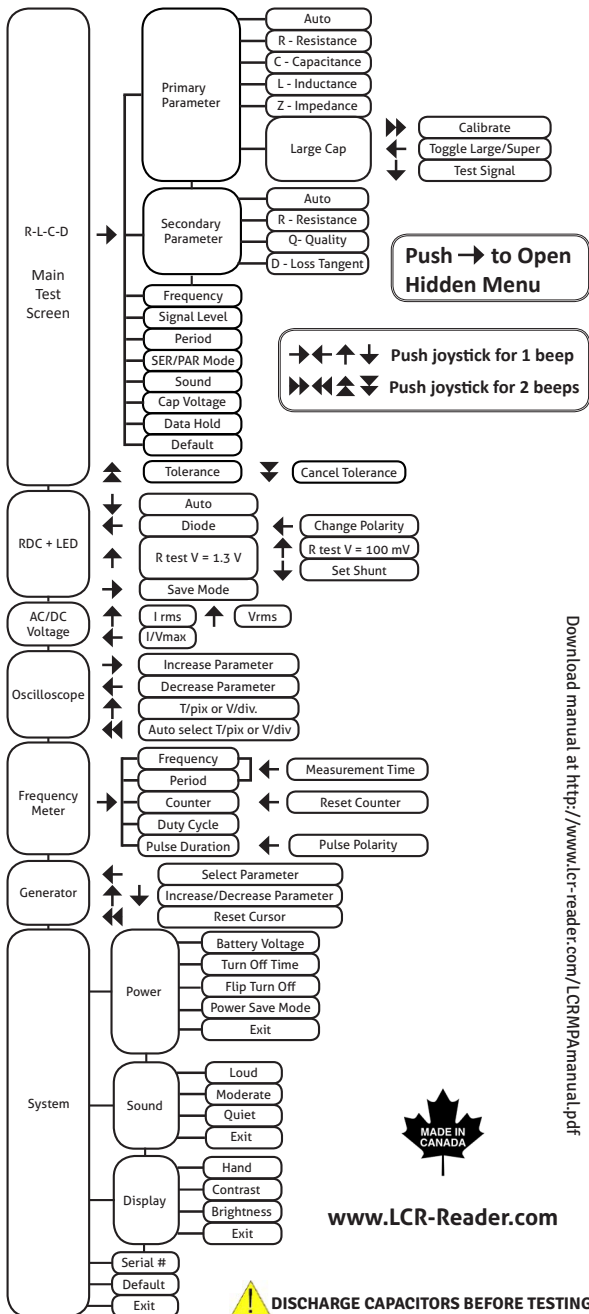

Push → to Open Hidden Menu

↔↔↔↔↔↔ Push joystick for 1 beep
 ↔↔↔↔↔↔ Push joystick for 2 beeps


Siborg Systems Inc. 24 Combermere Crescent, Waterloo, Ontario, Canada N2L 5B1 1-519-888-9906
 Download manual at <http://www.lcr-reader.com/LCRMManual.pdf>



www.LCR-Reader.com

 **DISCHARGE CAPACITORS BEFORE TESTING**

LCR-Reader-MPA

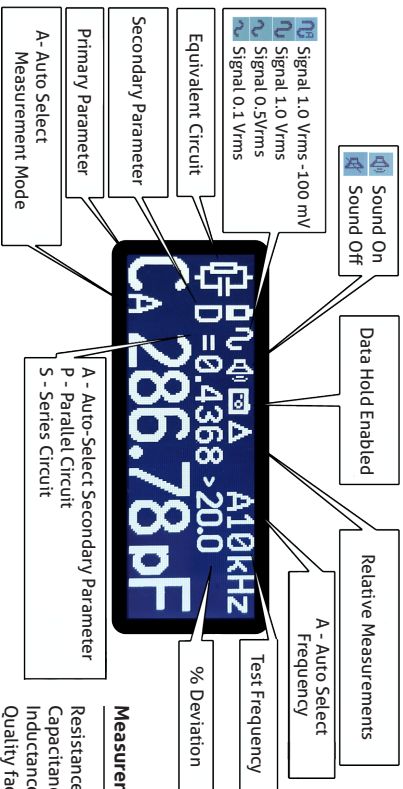

Technical Specifications

Test Signal	1.0, 0.5, 0.1 Vrms
Test Signal Frequency:	100 Hz, 120 Hz, 1 kHz, 10 kHz, 20 kHz, 30 kHz, 40 kHz, 50 kHz, 60 kHz, 75 kHz, 100 kHz
Test Frequency Accuracy	±(0.005%+5) Hz
Source Resistance:	100 Ohms

Physical Specifications

Size:	166 x 23 x 14 mm (6.5 x 0.9 x 0.55 in.)
Weight:	35 grams (1.23 oz.)
Operating temperature:	10°C to 40°C
Battery Type:	3.7V LiPO Rechargeable 250mAh
Battery Life (continuous):	Over 8 hours (without backlight)

Measurement Ranges

Resistance R:	5 mΩ to 20 MΩ
Capacitance C:	1 pF to 680 mF
Inductance L:	10 nH to 100 H
Quality factor Q:	0.001 to 1000
Dissipation factor D:	0.001 to 1000



SIBORG
SYSTEMS INC

Siborg Systems Inc.
24 Combermere Crescent,
Waterloo, Ontario, Canada



DISCHARGE CAPACITORS BEFORE TESTING

www.LCR-Reader.com